

SAFETY INSTRUCTIONS



# SAFETY INSTRUCTIONS



0, 1, 2, 4, 5b, 7, 8, 9, 11, 12, 15, 16, 17, 20, 21, 22, 23

**A**

+ 25, 26

**B**









+ 19

**C**

**PAULMANN LICHT GmbH**  
Quezinger Feld 2 • D-31832 Springe  
[www.paulmann.com](http://www.paulmann.com)  
☎ +49 (0) 5041 998 389

**INFO-LINE**

7<sup>00</sup> - 20<sup>00</sup>  
Mon. - Fri.

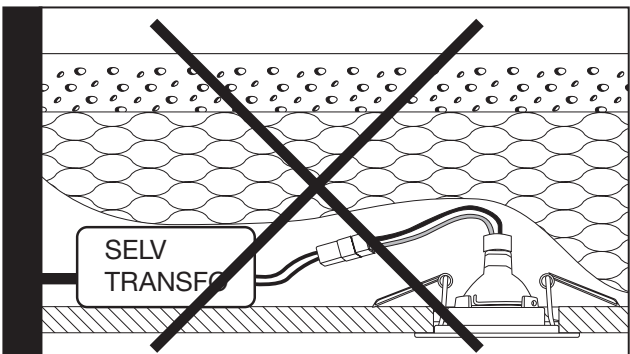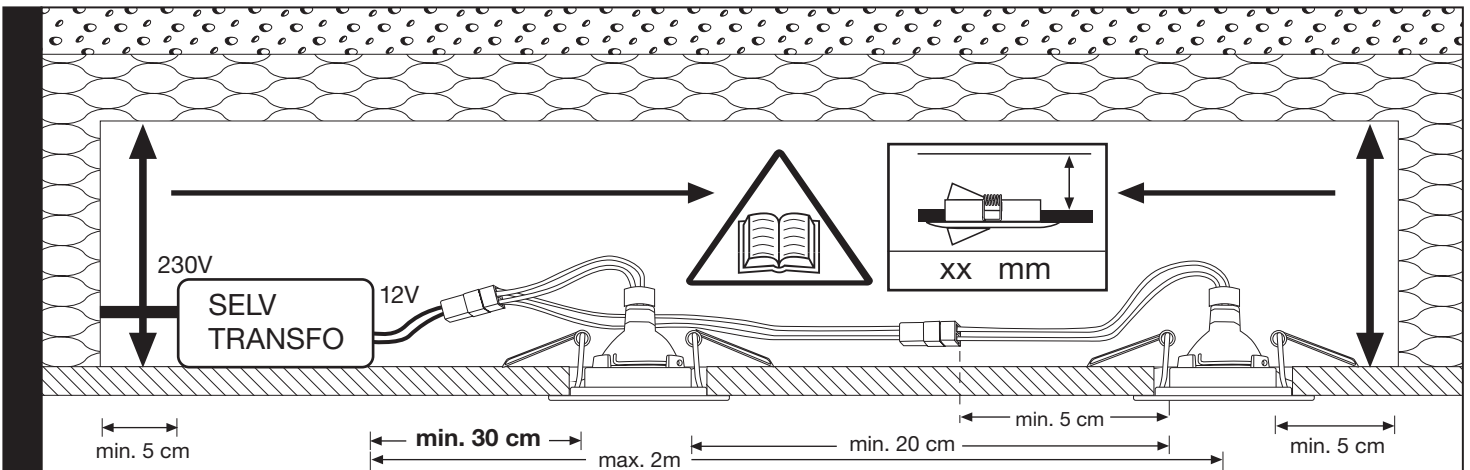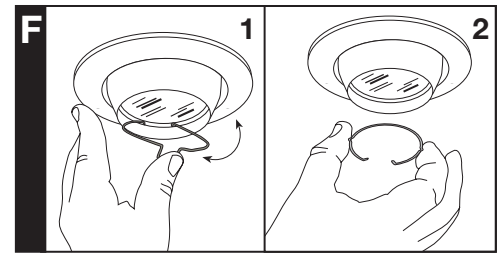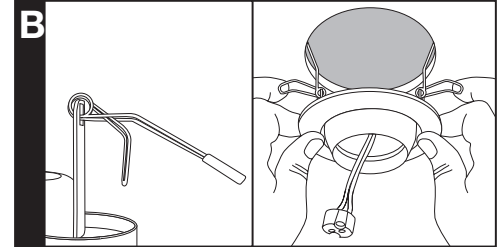


60 % 			W rmeverteilung R partition de la chaleur Warmteverdeling Heat distribution Distribuci n t rmica
40 % 	20 % 	80 % 	
		COOL BEAM COOL BEAM SECURITY AKZENT	

**IP 23**

**IP 44**

**IP 23**  
**IP 44**

**IP 20**

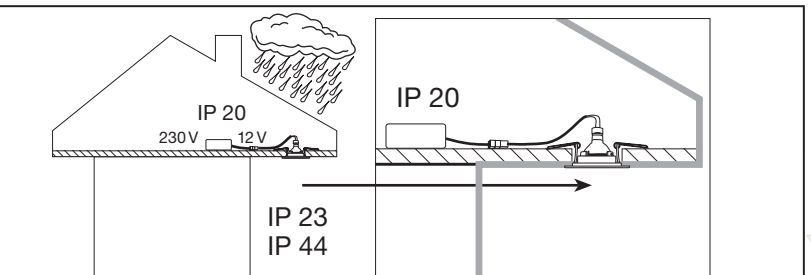

	[ mm ]	[ W ]	[ W ]	[ W ]	[ mm ]	[ m ]	[ mmø ]	[ mm ]	[ cm ]	[ ° ]	[ ° ]	[ mm ]	[ mm ]	
<b>A</b>		110	50	50		51	0,5	92	60	≥ 20	20		8-20	
		85	35	35		35	0,5	64	50	≥ 20	20		5-20	
		83	50	35		51	0,5	73	60	≥ 20			5-20	
		64	35	20		35	0,5	57	50	≥ 20			5-20	
<b>B</b>		69x79	35	35		45x51	0,5	60	$\frac{60}{\sqrt{2}} > 110$	≥ 20			5-20	
		68x68	35	35		37x37	0,5	60	$\frac{64}{\sqrt{2}} > 110$	≥ 20			5-20	
		92	50	35		51	0,5	76	60	≥ 20	20		5-20	
		99	50	35		51	0,5	86	$\frac{60}{\sqrt{2}} > 110$	≥ 20	45		3-20	
		79	50	35		51	0,5	70	$\frac{60}{\sqrt{2}} > 110$	≥ 20			5-20	
		55	35	20		35	0,5	51	$\frac{50}{\sqrt{2}} > 110$	≥ 20			5-20	
		83	50	50		51	0,5	68	$\frac{60}{\sqrt{2}} > 110$	≥ 20	30		5-20	
		66	35	20		35	0,5	60	$\frac{50}{\sqrt{2}} > 110$	≥ 20	30		5-20	
		91	35	35		51	0,5	73	60	≥ 20	20		5-20	
	<b>C</b>		50			20	G4 Gy6,35		40	> 30	≥ 10			5-20
		70			20	G4	0,2	60		≥ 10		> 25	5-20	
		72			20	G4	0,2	64		≥ 10		> 25	5-20	
		66			20	G4	0,2			≥ 10			5-20	
		66			20	G4	0,2	54		≥ 10		> 25	5-20	
		69			20	G4	0,2	60		≥ 10	17	> 25	5-20	